


LCB 1206H High Current Chip Beads


Test Instruments: HP4291A Impedance / Material Analyzer

Part Number	Test Freq. (MHz)	Impedance (Z(±25%))	DCR (Ω) Max	Rated Current (mA) Max.
LCB1206H-190	100	19	0.05	600
LCB1206H-260	100	26	0.05	600
LCB1206H-320	100	32	0.05	600
LCB1206H-500	100	50	0.10	500
LCB1206H-600	100	60	0.10	500
LCB1206H-700	100	70	0.10	500
LCB1206H-900	100	90	0.15	500
LCB1206H-121	100	120	0.15	500
LCB1206H-151	100	150	0.15	500
LCB1206H-201	100	200	0.20	400
LCB1206H-401	100	400	0.20	400
LCB1206H-501	100	500	0.20	400
LCB1206H-601	100	600	0.30	400
LCB1206H-102	50	1000	0.40	200
LCB1206H-122	50	1200	0.40	200
LCB1206H-152	50	1500	0.45	200
LCB1206H-202	30	2000	0.60	200
LCB1206H-272	30	2700	0.60	200


LCB1206H-190

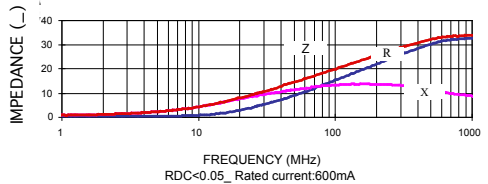


LCB1206H-260

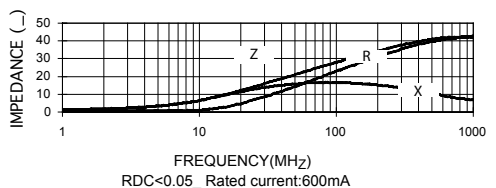


LCB1206H-320

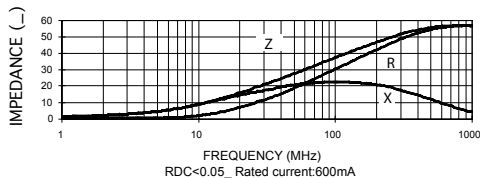


LCB1206H-500

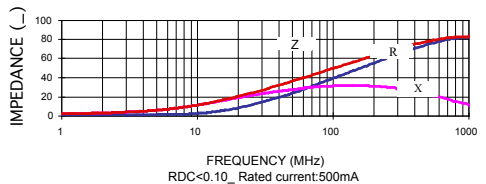


LCB1206H-600

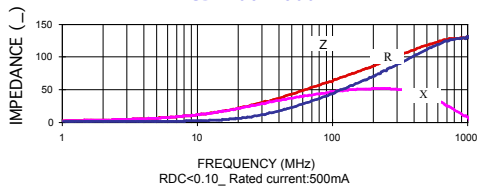


LCB1206H-900

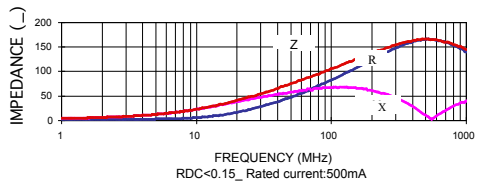

LCB1206H-151

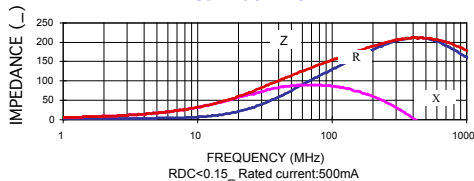

LCB1206H-700

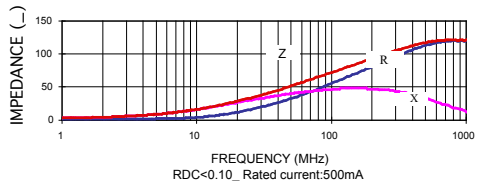

LCB 1206H High Current Chip Beads

Test Instruments: HP4291A Impedance / Material Analyzer

