


LCB1612/A Power Beads



FEATURES

- ◇ Extremely high reliability in a wide temperature and humidity range.
- ◇ Superior Q.
- ◇ Excellent for flow, re-flow soldering.

APPLICATIONS


- ◇ High Frequency Circuits.
- ◇ Hand Held Electronics.

INDUCTANCE: 1.0 N

OPERATING TEMPERATURE RANGE: -40°C TO +100°C

TOLERANCES: 2%, 5% AND 10%

LCB1612A

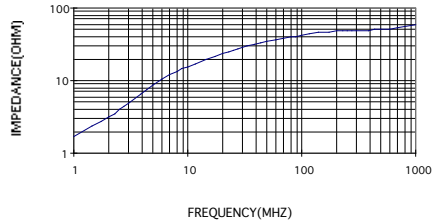

DIMENSIONS IN MM

Part Number	Test Frequency		DC R (Ω) Max
	25MHz	100MHz	
LCB1612A	24 Ω°	36 Ω°	36 Ω°